



IOTRON™ SENSORS

INTEGRATED INDUSTRIAL pH SENSOR SPECIFICATIONS

| | |
|--|--|
| <u>Sensor Part Number & Short Description:</u> | 6531 – Pulp & Paper Resistant pH Sensor for Inline Use with ¾” MNPT Front Threads Immersion and Submersion Type Installations with 1” MNPT Rear Threads |
| <u>Configuration Type:</u> | <i>Interface with ¾” FNPT threads of tee or process tank for Inline Use or 1” FNPT threads on insertion tube for immersion or waterproofing seal for submersible installations</i> |
| <u>General Sensor Specifications:</u> | |
| Operating Temperature Range: | -5 to 105°C (-35 to 150°C with Extreme Dehydration Resistant “E” Option – PVDF Only) |
| Operating Pressure Range: | 1 to 150 psig (6.9 to 1035 kPa) with ¾” MNPT Front Threads for Inline Installations |
| Sensor Body Material: | RADEL® R-5000 NT (Poly-Phenyl-Sulfone, PPSU) |
| Junction Support Matrix Material: | KYNAR® (Poly-Vinylidene-Fluoride, PVDF) Standard or Polypropylene (PP) - 6531PP |
| External Dimensions: | See Drawing 6-2 |
| <u>pH Measurement Specifications:</u> | |
| Measurement pH Range: | 0 to 14 pH (-0.5 to +14.5 with Wide Range Option Invoked, Alpha Prefix “V”) |
| Measuring Glass Type: | Low-Profile Parabolic Thick-Wall Break-Resistant, Green Glass (MUGG) |
| pH Glass Dimensions: | 0.315” (8.0 mm) DIA |
| Initial Impedance: | < 1,500 MΩ @ 25 °C |
| Sodium Ion Error: | Less than 0.15 pH in sodium (Na ⁺) solutions at pH 14.00 |
| Acidic Error: | Less than 0.05 pH in hydrochloric acid (HCl) solutions at 0.00 pH |
| <u>Reference System Specifications:</u> | |
| Type: | Double Junction Standard (Triple Junction Optional, Alpha Prefix “TJ”) |
| Reference Half Cell: | Ag/AgCl, Saturated KCl |
| Primary Junction: | Porous Ceramic, Sat. KCl in crosslinked polymer, Interfaced to Secondary Junction |
| Secondary Junction: | Solid-State Non-Porous Cross-Linked Polymer embedded in Kynar/Polypropylene Matrix holds excess KCl assuring saturation at all temps for stability & long sensor service life |
| <u>Supported Order Options with Alpha Prefix Order Code Designation:</u> | Ammonia gas resistant (“A”), Chlorine gas resistant (“C”), Organic Media Resistant (“L”), Solvent Resistant (“TS”), 3-Wire TC (“M”), ACCU-TEMP Fast TC (“X”), Reduce to 2 ea Protective Tines (“GRO”), No Protective Tines (“NG”), Shielded Preamp Cable (“BL”) |
| <i>Inquire to factory for specials</i> | |
| <u>Example Recommended Applications:</u> | Abrasive pulp slurries, high pressure and high flow velocity paper process lines. Inline, immersion or submersible installs for use bleaching and digester process lines. Any measurement where aggressive chemical cleaning is needed to remove fouling and/or low-maintenance operation is required with minimal cleaning and re-calibration. |
| <u>Storage and Shelf Life:</u> | One (1) year from date of dispatch from factory when stored at indoor ambient room temperature with proper orientation & protector cap. Extreme Dehydration Resistant Option (Alpha Prefix “E”) sensors are suitable for cold storage down to -35 °C (-31 °F). |
| <u>Available Configurations & Options:</u> | |
| Integrated Components: | <ul style="list-style-type: none">- Temperature Compensation Element (compatible type must be specified)- Solution Ground Liquid Earth, 316SS (alpha prefix “Y”), or Platinum (alpha prefix “Pt”)- Analog Conventional or Differential Preamp (Contact factory for available options)- Smart digital sensor board for use with 3TX-HiQ-pH Intelligent pH & ORP transmitters |
| Analog Sensors without integral preamplifier: | Terminated with Male BNC connector (-MBNC) or Tinned Lead Wires (-TL) |
| Analog Sensors with integral preamplifier: | Terminated with Tinned Lead Wires (-TL) or Quick Disconnect NEMA 6P Snap (-Q7M) |
| Analog Dual pH & ORP All-in-one Sensors <i>without integral preamplifier style only:</i> | Terminated with tinned lead wires (-TL), Alpha Prefix “PtD”, 2 each reference half-cells allow for simultaneous use on two completely separate input channels or transmitters |
| Digital Smart Sensors: | Terminated standard with quick disconnect IP67/NEMA 6P rated waterproof & corrosion resistant snap HiQ4M connector. For 3TX-HiQ-pH Intelligent pH & ORP transmitters or HiQDT style with RS-485 MODBUS RTU to interface with any suitable PLC or SCADA (Minimum Order Quantity may apply for HiQDT style version, contact factory for details) |


1

2

3

| REVISION HISTORY | | |
|------------------|-------------|------|
| REV | DESCRIPTION | DATE |
| | | |
| | | |

APPROVED

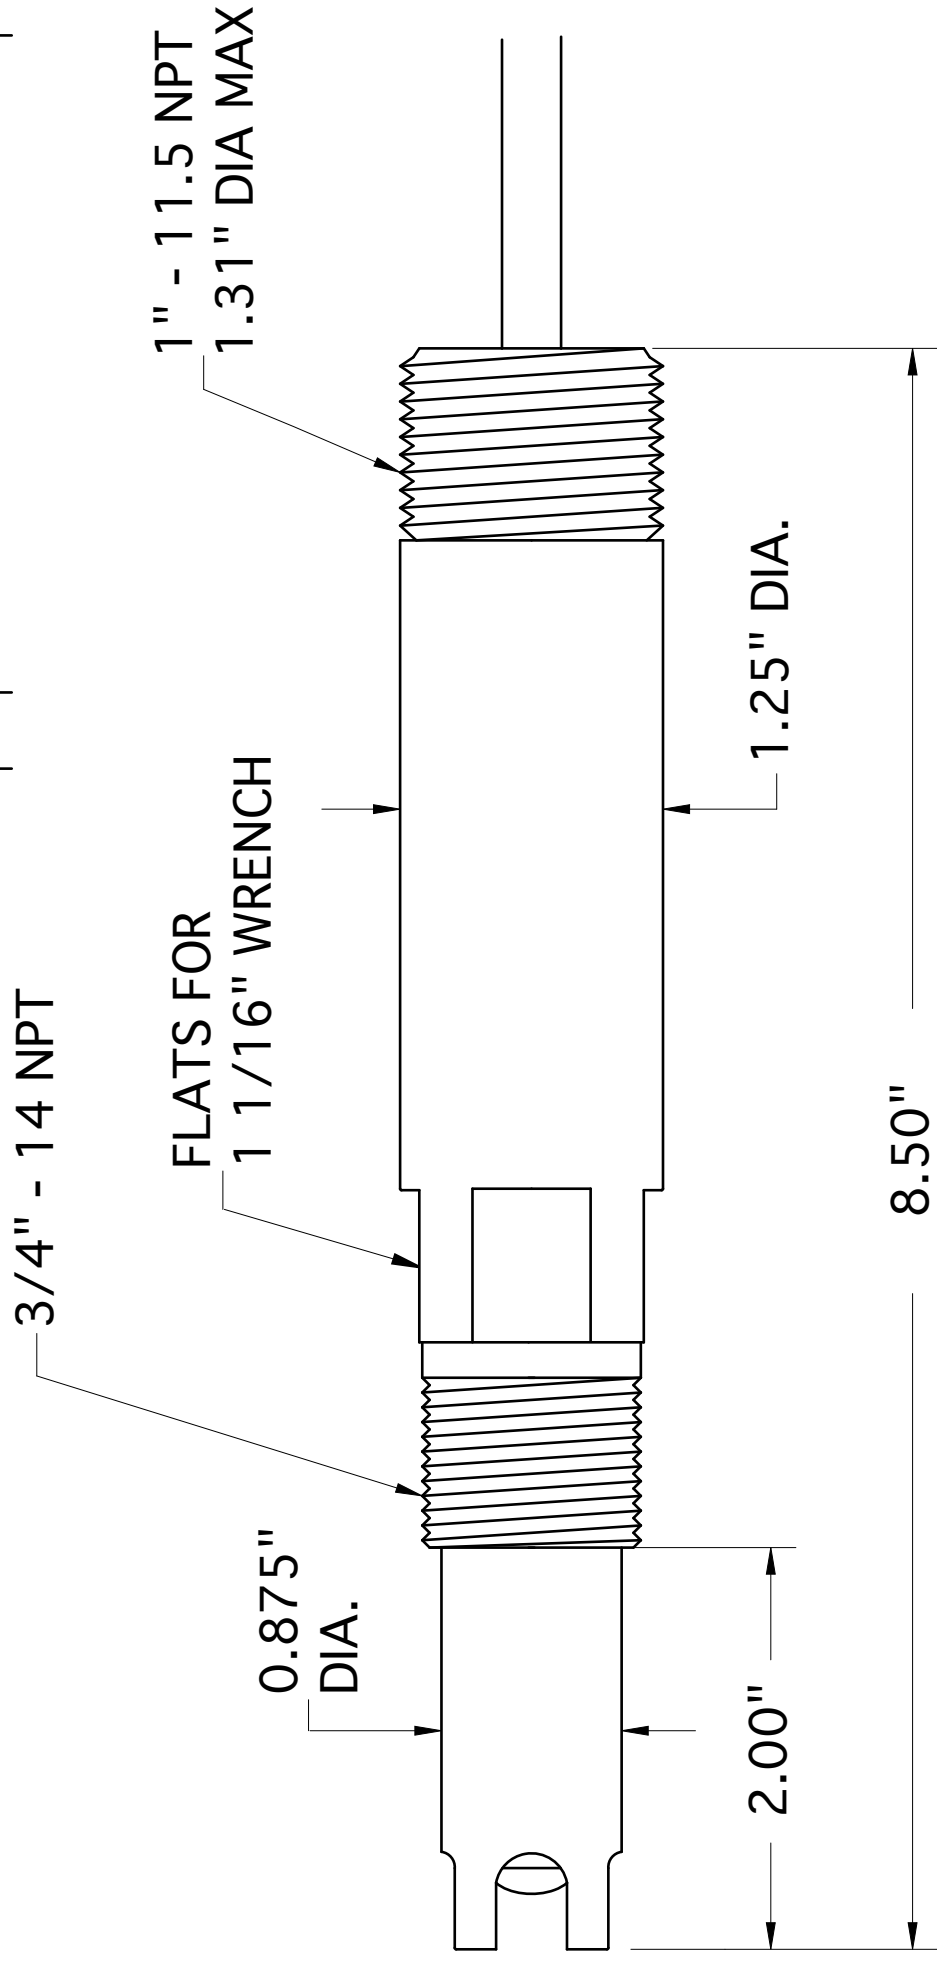

A

A

NOTES

- All dimensions are in inches, unless otherwise indicated with tolerances as detailed below
- Sensor body material of construction is RADEL (6X31), PEEK (6X41) or RYTON (6X51, 6X52)
- Drawing shown in the standard with protective tines configuration (4 places, 90 degrees apart).
The 2 protective tines only "GRO" configuration (2 places, 180 degrees apart) is optional.
- In the alternate without tines configuration ("NG") the sensor body is exactly 8.0 inches in length.
The max displacement for parabolic pH glass is 0.2" yielding a max insertion depth of 1.7 inches past threads & overall max length of 8.2 inches.
- Do not use any sensor beyond the factory defined maximum temperature or pressure rating.

B

B



Advanced Sensor Technologies U.S.A.
Website: <http://www.astisensor.com>

| | | | |
|--------------|-----------|---|--------|
| TITLE | | 3/4"-1" MNPT Inline / Immersion / Submersible | |
| SIZE | PROJECT | DRAWING NO. | REV |
| B | IMMERSION | 6-2 Low-Profile pH Glass | / |
| SCALE | | MODEL | SHEET |
| Not to Scale | | 6X31,6X41,6X51,6X52 | 1 OF 1 |

1

2

3